




Edelweiss Smarthome User Manual

1) Downloading Mobile App



- 1) Go to  'App Store' for IOS or  'Play Store' for Android to download 'Tuya Smart' mobile app.
- 2) Key in 'Tuya Smart' in the search box.
- 3) After you find 'Tuya Smart', click 'Install'.

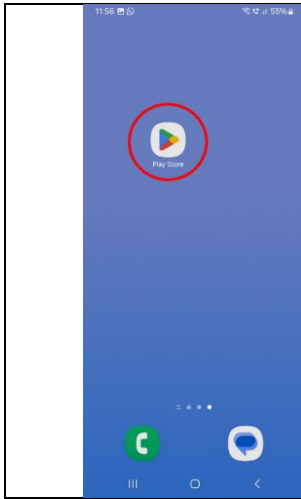


2) Open Tuya Smart

2.1 Log In credential that was given




- 1) Open 'Tuya Smart' mobile app.
 - 2) Click 'Log In'.
- Login credential is provided in the 'Thank You Card'.

2.2 Log In to valid Account

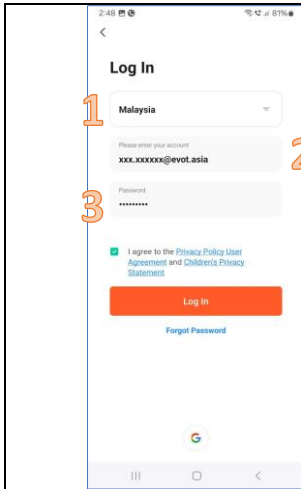

- 1) Choose country **'Malaysia'** from drop-down box.
- 2) Enter an Account and Password.
- 3) Tick **'I agree'** box.
- 4) Click **'Log in'**.

2.3 Home page

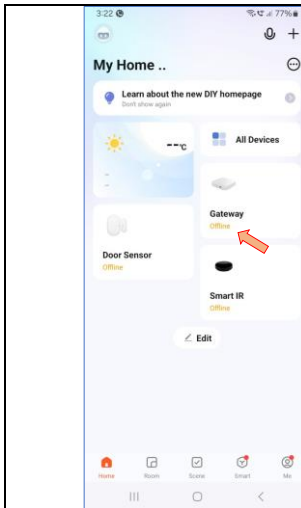

- 1) At Home page, you will see all devices is **'Offline'**.
 - These devices need to pair to your home Wi-Fi to be functional.

3) Pair Smart Wireless Gateway

3.1 Unbox Wireless Gateway




- 1) Unbox Smart Wireless Gateway and USB Power Adapter.
- 2) Inside the box have Wireless Gateway, Micro USB Cable & Instruction Manual.
- 3) Unbox USB Power Adapter.

3.2 Plug cable to Wireless Gateway




- 1) Plug cable to Wireless Gateway and another end to Power Adapter.
- 2) Plug to power socket.
 - It is recommended to locate Wireless Gateway at Living TV Cabinet (**Open area**).
 - Have **1-meter distance** from Internet Router.


3.3 Pairing Wireless Gateway

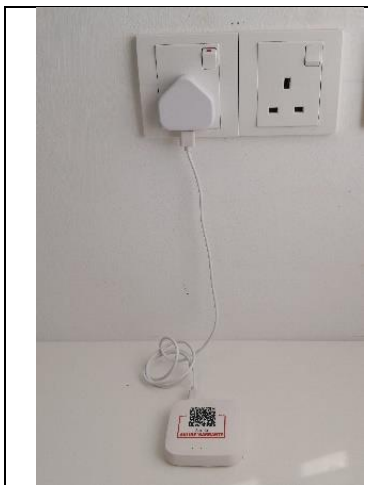


- 1) Turn on power socket, press **'Reset'** button for at least 5 seconds until both LED indicator lights are on and then release the button. Wait for a few second until blue light is steady and red light is blinking, the Wireless Gateway is ready for pairing.

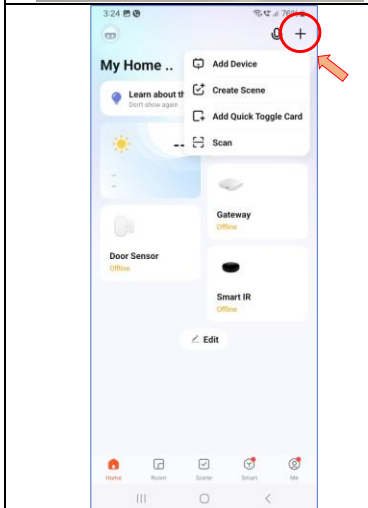

- 2) At **'Tuya Smart'** App, press **'+'** button from top right and select **'Add Device'**.

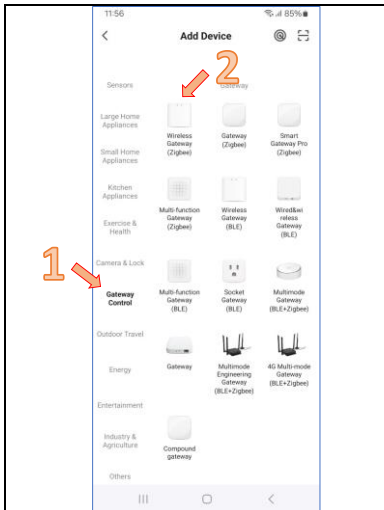


3) Scroll down at left, choose **'Gateway Control'**. Select first icon **'Wireless Gateway (Zigbee)'**.

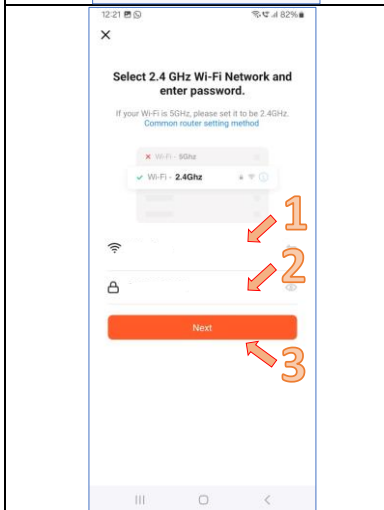
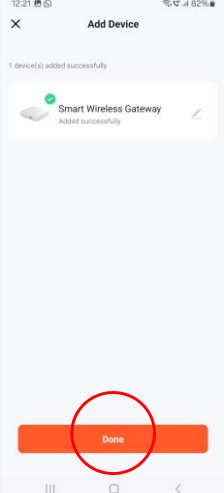


4) Follow the instructions on the screen Type-in your house 2.4GHz Wi-Fi (SSID) **Name** and **Password**. After done, press **'Next'**.

- Connect mobile phone to 2.4GHz Wi-Fi before start pairing. Only supported 2.4GHz.

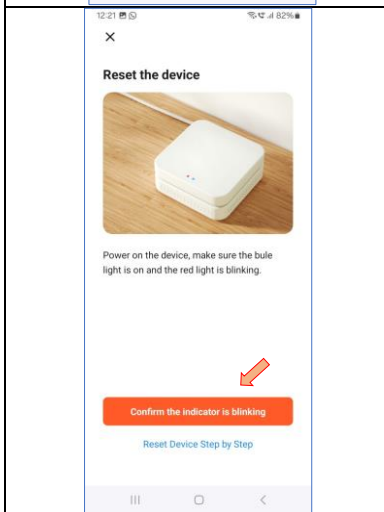



5) Check **Wireless Gateway for LED status**. In pairing mode, **Blue LED will steady** and **Red LED is blinking**. After done checking LED light is correct, click **'Confirm the indicator is blinking'**.

	<p>6) Choose 'Blink Quickly' and it will start to connecting Wireless Gateway to your home Wi-Fi. This will take 2 minutes.</p> <ul style="list-style-type: none"> • If 'Failed to add the device', press 'Retry'. • Else reset the pairing setting by restarting the power socket. Follow steps 4.3 (1->6).
	<p>7) After detected device, press 'Done' to successful add Wireless Gateway.</p>


4) Pair Smart Door and Window Sensor

4.1 Check Sensor status

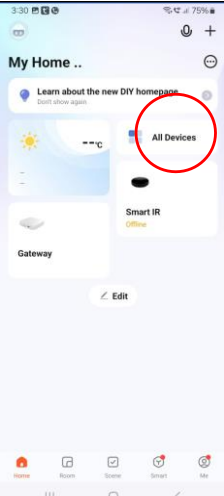
	<p>1) At 'Home' tab, you can view 'Door Sensor' device here. Press it.</p>
---	--

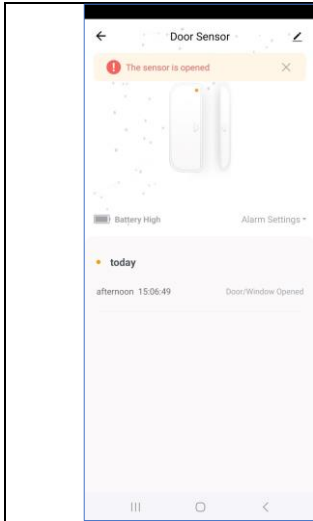

2) Test the Door Sensor by separate Sensor Unit with Magnet. You will receive notification status from your mobile phone.



4.2 Smart Sensor to be locate

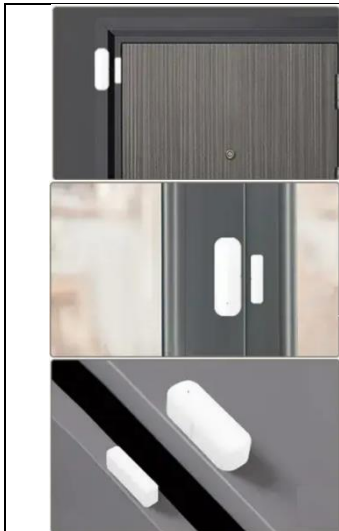


Smart sensor use for detects the status of your door or window. You can set automation & time schedule. It can apply to: -

- Main Entrance
- Balcony Sliding Door
- Window
- Cabinet


Exp; Activate at midnight for Main Entrance, will send notification if someone open the door.

4.3 If Door Sensor no response, follow the step to pairing back

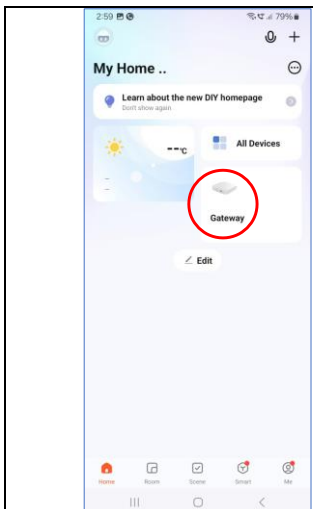


1) At '**Home**' tab, select '**Wireless Gateway**'.

- If you cannot view **Door Sensor** at Tuya Smart app, you can pair back to Gateway.

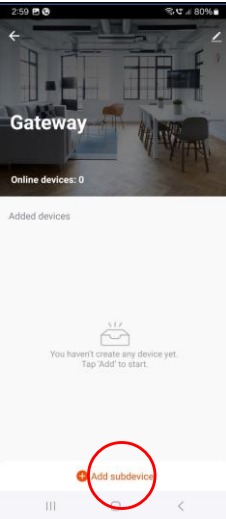


2) Inside this Gateway is locate all paired Zigbee Devices. If you cannot view sensor here, you can click **'+Add subdevice'**.

- Set sensor into pairing mode. **Press and hold button for about 10 seconds** until the LED indicator light blinks. Button is located below Sensor Unit.

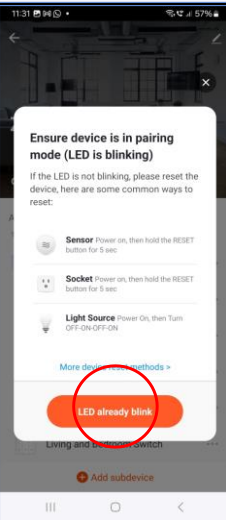

3) After sensor in pairing mode. Press **'LED already blink'**. It will start discover nearby devices. May takes 1 to 2 minutes.

- If sensor not blinking and cannot discover, set to pairing mode and pair again.

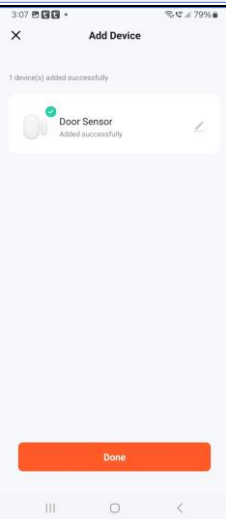

4) After discover sensor, press **'Done'**. Then select **edit** next to sensor to rename it. You may rename according to your preference.

Examples: -

- Rename to **'Door Sensor'**
- Rename to **'Window Sensor'**

5) After rename, press **'Done'**.

5) Pair Smart IR (Infrared)

5.1 Unbox Smart IR



- 1) Unbox Smart IR and USB Power Adapter.
- 2) Inside the box have Smart IR, Micro USB Cable & Instruction Manual.
- 3) Unbox USB Power Adapter.

5.2 Plug cable to Smart IR




- 1) Plug cable to Smart IR and another end to Power Adapter.
- 2) Plug to power socket.
 - It is recommended to locate Smart IR at Living TV Cabinet (**Open area**).
 - Have **1-meter distance** from Internet Router.
 - Have visible view to Air-Conditioner.

5.3 Pairing Smart IR




- 1) Turn on power socket, press '**Reset**' button for at least 5 seconds until LED light blinks. Smart IR is ready for pairing.




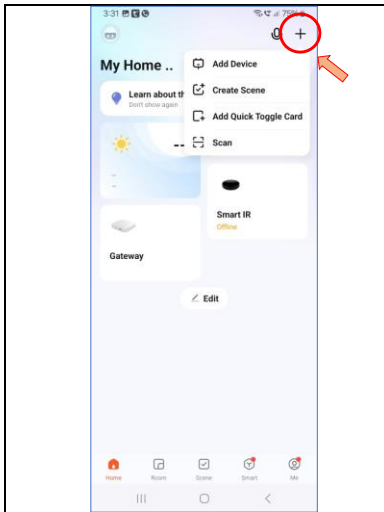

2) At **'Tuya Smart'** App, press **'+'** button from top right and select **'Add Device'**.

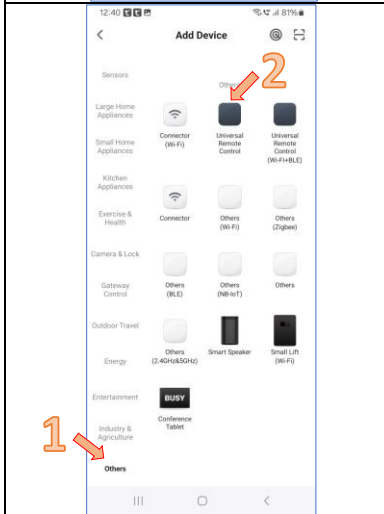

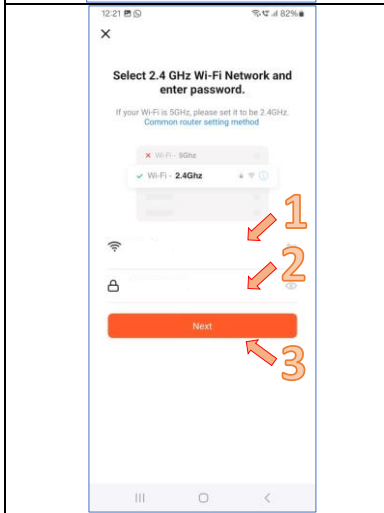



3) Scroll down at left, choose **'Others'**. Select first icon **'Universal Remote Control'**.




4) Follow the instructions on the screen Type-in your house 2.4GHz Wi-Fi (SSID) **Name** and **Password**. After done, press **'Next'**.

- Connect mobile phone to 2.4GHz Wi-Fi before start pairing. Only supported 2.4GHz.

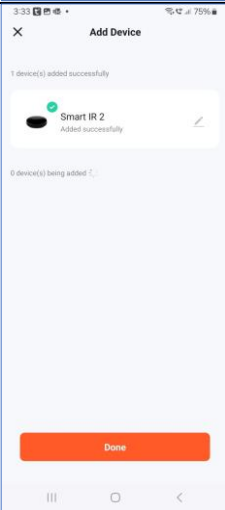	<p>5) Check Smart IR for LED status. In pairing mode, Blue LED is blinking. After done checking LED light is correct, click 'Confirm the indicator is blinking'.</p>
	<p>6) Choose 'Blink Quickly' and it will start to connecting Smart IR to your home Wi-Fi. This will take 2 minutes.</p> <ul style="list-style-type: none">• If 'Failed to add the device', press 'Retry'.• Else reset the pairing setting by restarting the power socket. Follow steps 5.3 (1->6).
	<p>7) After detected device, press 'Done' to successful add Smart IR.</p>

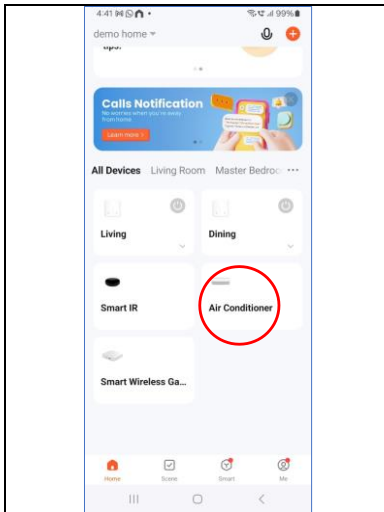


8) At **'Home'** tab, you can control **'Air Conditioner'**.

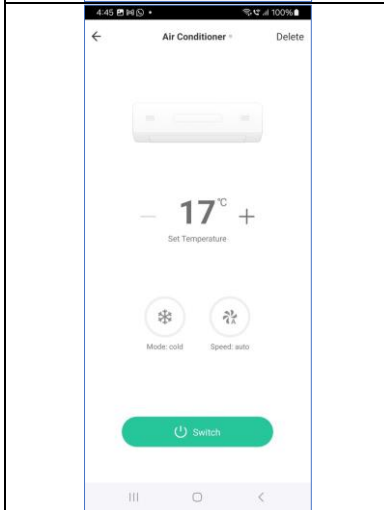


9) You can turn on / off of the AC.

- This Smart IR is pre-configurations to existing air-conditioner.

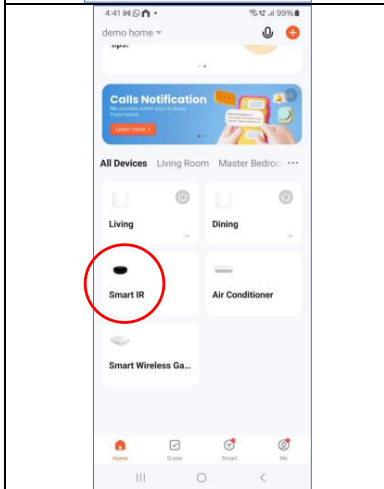

10) If you wish to control other devices that is infrared based such as fan, TV or TV Box, press **'Smart IR'** at **'Home'** tab.

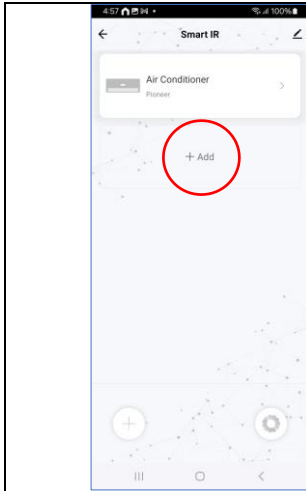

11) Select '**+ Add**'. Follow the guide and instructions in the app to add remote devices.

6) Pair Smart Plug

6.1 Unbox Smart Plug






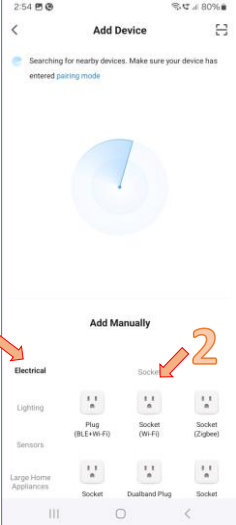
- 1) Unbox Smart Plug.
- 2) Inside the box have Smart Plug & Instruction Manual.


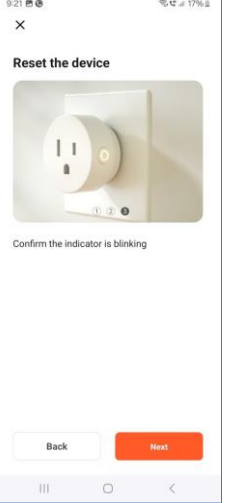

6.2 Plug in Smart Plug






- 3) Plug in Smart Plug to wall socket.

6.3 Pairing Smart Plug

	<p>1) Turn on wall socket, press 'Power' button for at least 5 seconds until LED light blinks. Smart Plug is ready for pairing.</p> 
	<p>2) At 'Tuya Smart' App, press '+' button from top right and select 'Add Device'.</p>
	<p>3) At left, choose 'Electrical'. Select 'Socket (Wi-Fi)'.</p>

	<p>4) Follow the instructions on the screen Type-in your house 2.4GHz Wi-Fi (SSID) Name and Password. After done, press 'Next'.</p> <ul style="list-style-type: none">• Connect mobile phone to 2.4GHz Wi-Fi before start pairing. Only supported 2.4GHz.
	<p>5) Follow instructions in the app. Check Smart Plug for LED status. In pairing mode, Blue LED is blinking. After done checking LED light is correct, click 'Confirm the indicator is blinking'.</p>
	<p>6) Choose 'Blink Quickly' and it will start to connecting Smart IR to your home Wi-Fi. This will take 2 minutes.</p> <ul style="list-style-type: none">• If 'Failed to add the device', press 'Retry'.• Else reset the pairing setting by restarting the power socket. Follow steps 5.3 (1->6).

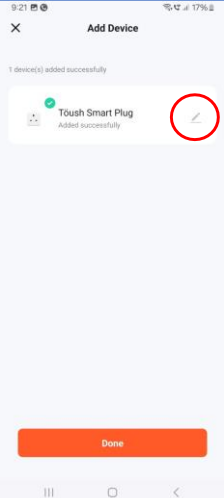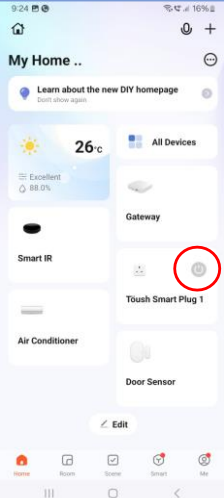	<p>7) After detected device, press 'Done' to successful add Smart Plug.</p> <ul style="list-style-type: none"> You can rename each Smart Plug.
	<p>8) At 'Home' tab, you can control 'Smart Plug' on or off by selecting it.</p>
	<p>12) You can turn on, off, time scheduling and set automations.</p>

6.4 Smart Plug to be locate



Smart Plug use to turn **On** and **Off** any appliances that plugs into standard wall socket. You can set automation & time schedule. It can apply to: -


- Stand Lamp
- Stand Fan




- Air Purifier
- Water Dispenser / Purifier

Exp; Set off water purifier at night to avoid boiling multiple times to save energy.


7) Bind to own Email

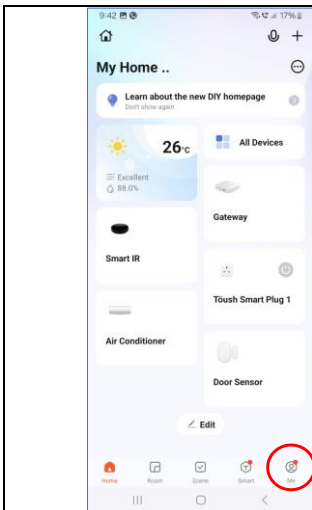




- 1) Owner have to transfer this temporarily Email Account to his own email. This temporarily account will be expired after **1 year**. You could lose all Automation Setting for your smarthome.
- 2) Follow the step to change to your own email.
- 3) At Home, select '**Me**' at the below right corner.


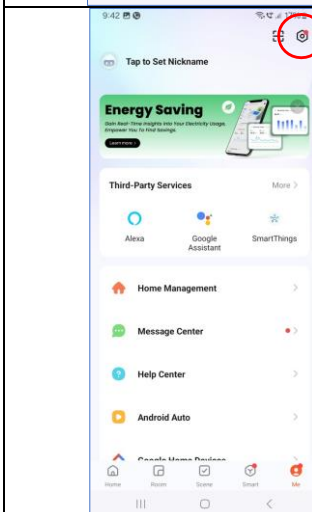


- 4) Press '**Settings**' button at right upper corner.

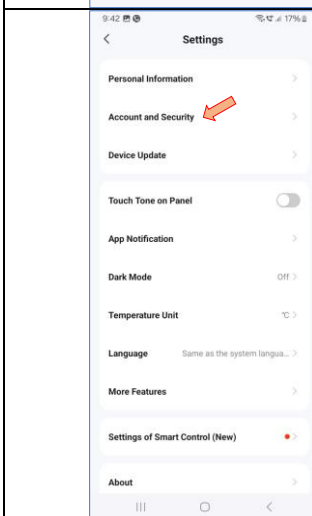


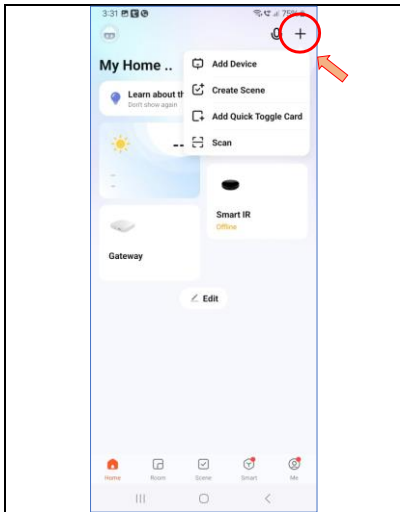
- 5) At the Settings, choose '**Account and Security**'.

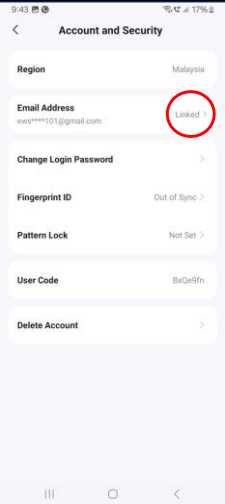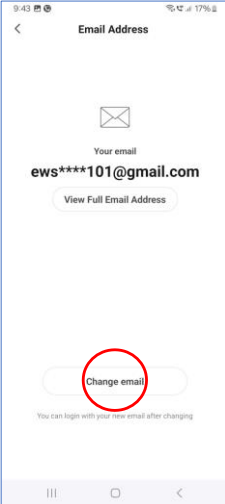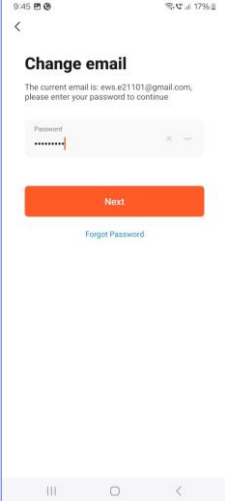	<p>6) You will see temporarily email at 'Email Address'. Press 'Linked' to view email information.</p>
	<p>7) From here, select 'Change email' to bind to your email account.</p>
	<p>8) Type-in existing default password that provided. Press 'Next' to proceed.</p> <ul style="list-style-type: none">• Password: 3vot@asia

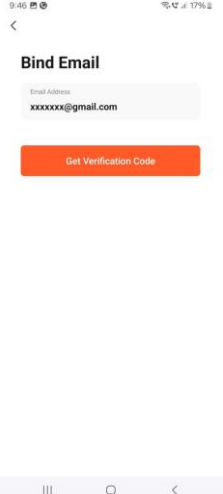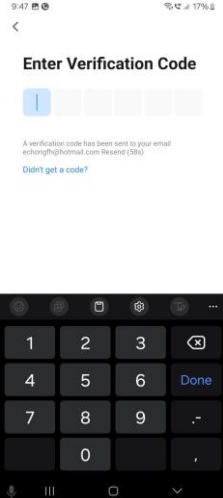
	<p>9) You can key-in your own email. Please key-in a valid email and select 'Get verification Code'.</p> <ul style="list-style-type: none"> You will receive 6-digits code from your email. <div style="text-align: center;"> <p>Verification code for binding email</p> <p>508679</p> <p>Verification code for binding email</p> <p>xxxxxx@hotmail.com</p> <hr/> <p><small>This code is valid for 30 mins. Please continue the next step in time.</small></p> </div>
	<p>10) Key-in the Code from your email. The code is valid for 30 minutes.</p> <p>11) You are advised to 'Change Login Password' at 'Account and Security' to protect your account.</p> <p>12) Done. You can enjoy your new smarthome.</p>

8) Pair Smart Digital Lock


	<ol style="list-style-type: none"> At 'Digital Lock', press * and # button to go setting. Enter 'Master Password'. Press 1 for 'Admin Setting'. Press 3 for 'Network Setting'. Press 2 for 'Intelligent Connection'.
---	---



6) At 'Tuya Smart' App, press '+' button from top right and select 'Add Device'.

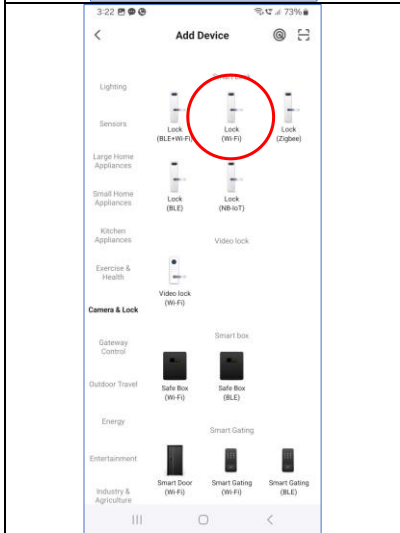

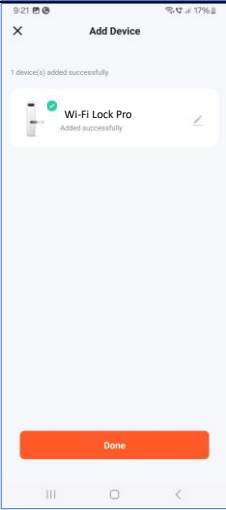


7) At left, choose 'Camera & Lock'. Scroll down and select 'Lock (Wi-Fi)'.

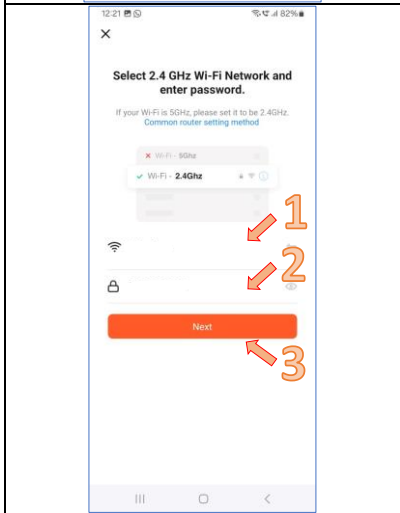

8) Follow the instructions on the screen Type-in your house 2.4GHz Wi-Fi (SSID) **Name** and **Password**. After done, press 'Next'.

- Connect mobile phone to 2.4GHz Wi-Fi before start pairing. Only supported 2.4GHz.

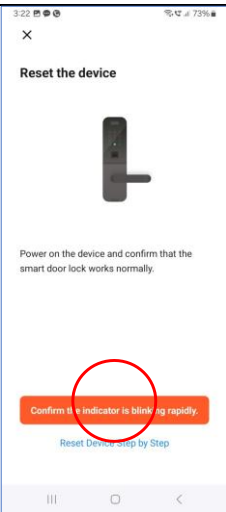	<p>9) Follow instructions in the app. Check Digital Lock for LED status. In pairing mode, LED is blinking rapidly. After done checking LED light is correct, click 'Confirm the indicator is blinking rapidly'.</p>
	<p>10) Choose 'EZ Mode' and it will start to connecting Digital Lock to your home Wi-Fi. This will take 2 minutes.</p> <ul style="list-style-type: none">• If 'Failed to add the device', press 'Retry'.• Else reset the pairing setting by re-enter Digital Lock to pairing mode. Follow 8 (1->6 steps).
	<p>11) After detected device, press 'Done' to successful add Digital Lock.</p>